



American Association of
State Highway and
Transportation Officials

Jack Lettiere, Jr., President
Commissioner
New Jersey Department of Transportation

John Horsley
Executive Director

ERRATA

Dear Customer:

Due to errors found after the publication had been completed, AASHTO has reprinted the fold-out map cited on pages 447 and 449, which was unintentionally omitted from the second printing of the *Standard Specifications for Highway Bridges*, 17th Edition. It is an enlarged version of Figure 3.2A, including counties.

Please insert the enclosed map at the end of Division IA, after page 474. We apologize for any inconvenience this omission may have caused.

AASHTO Publications Staff

HB-17-EMP

August 2005



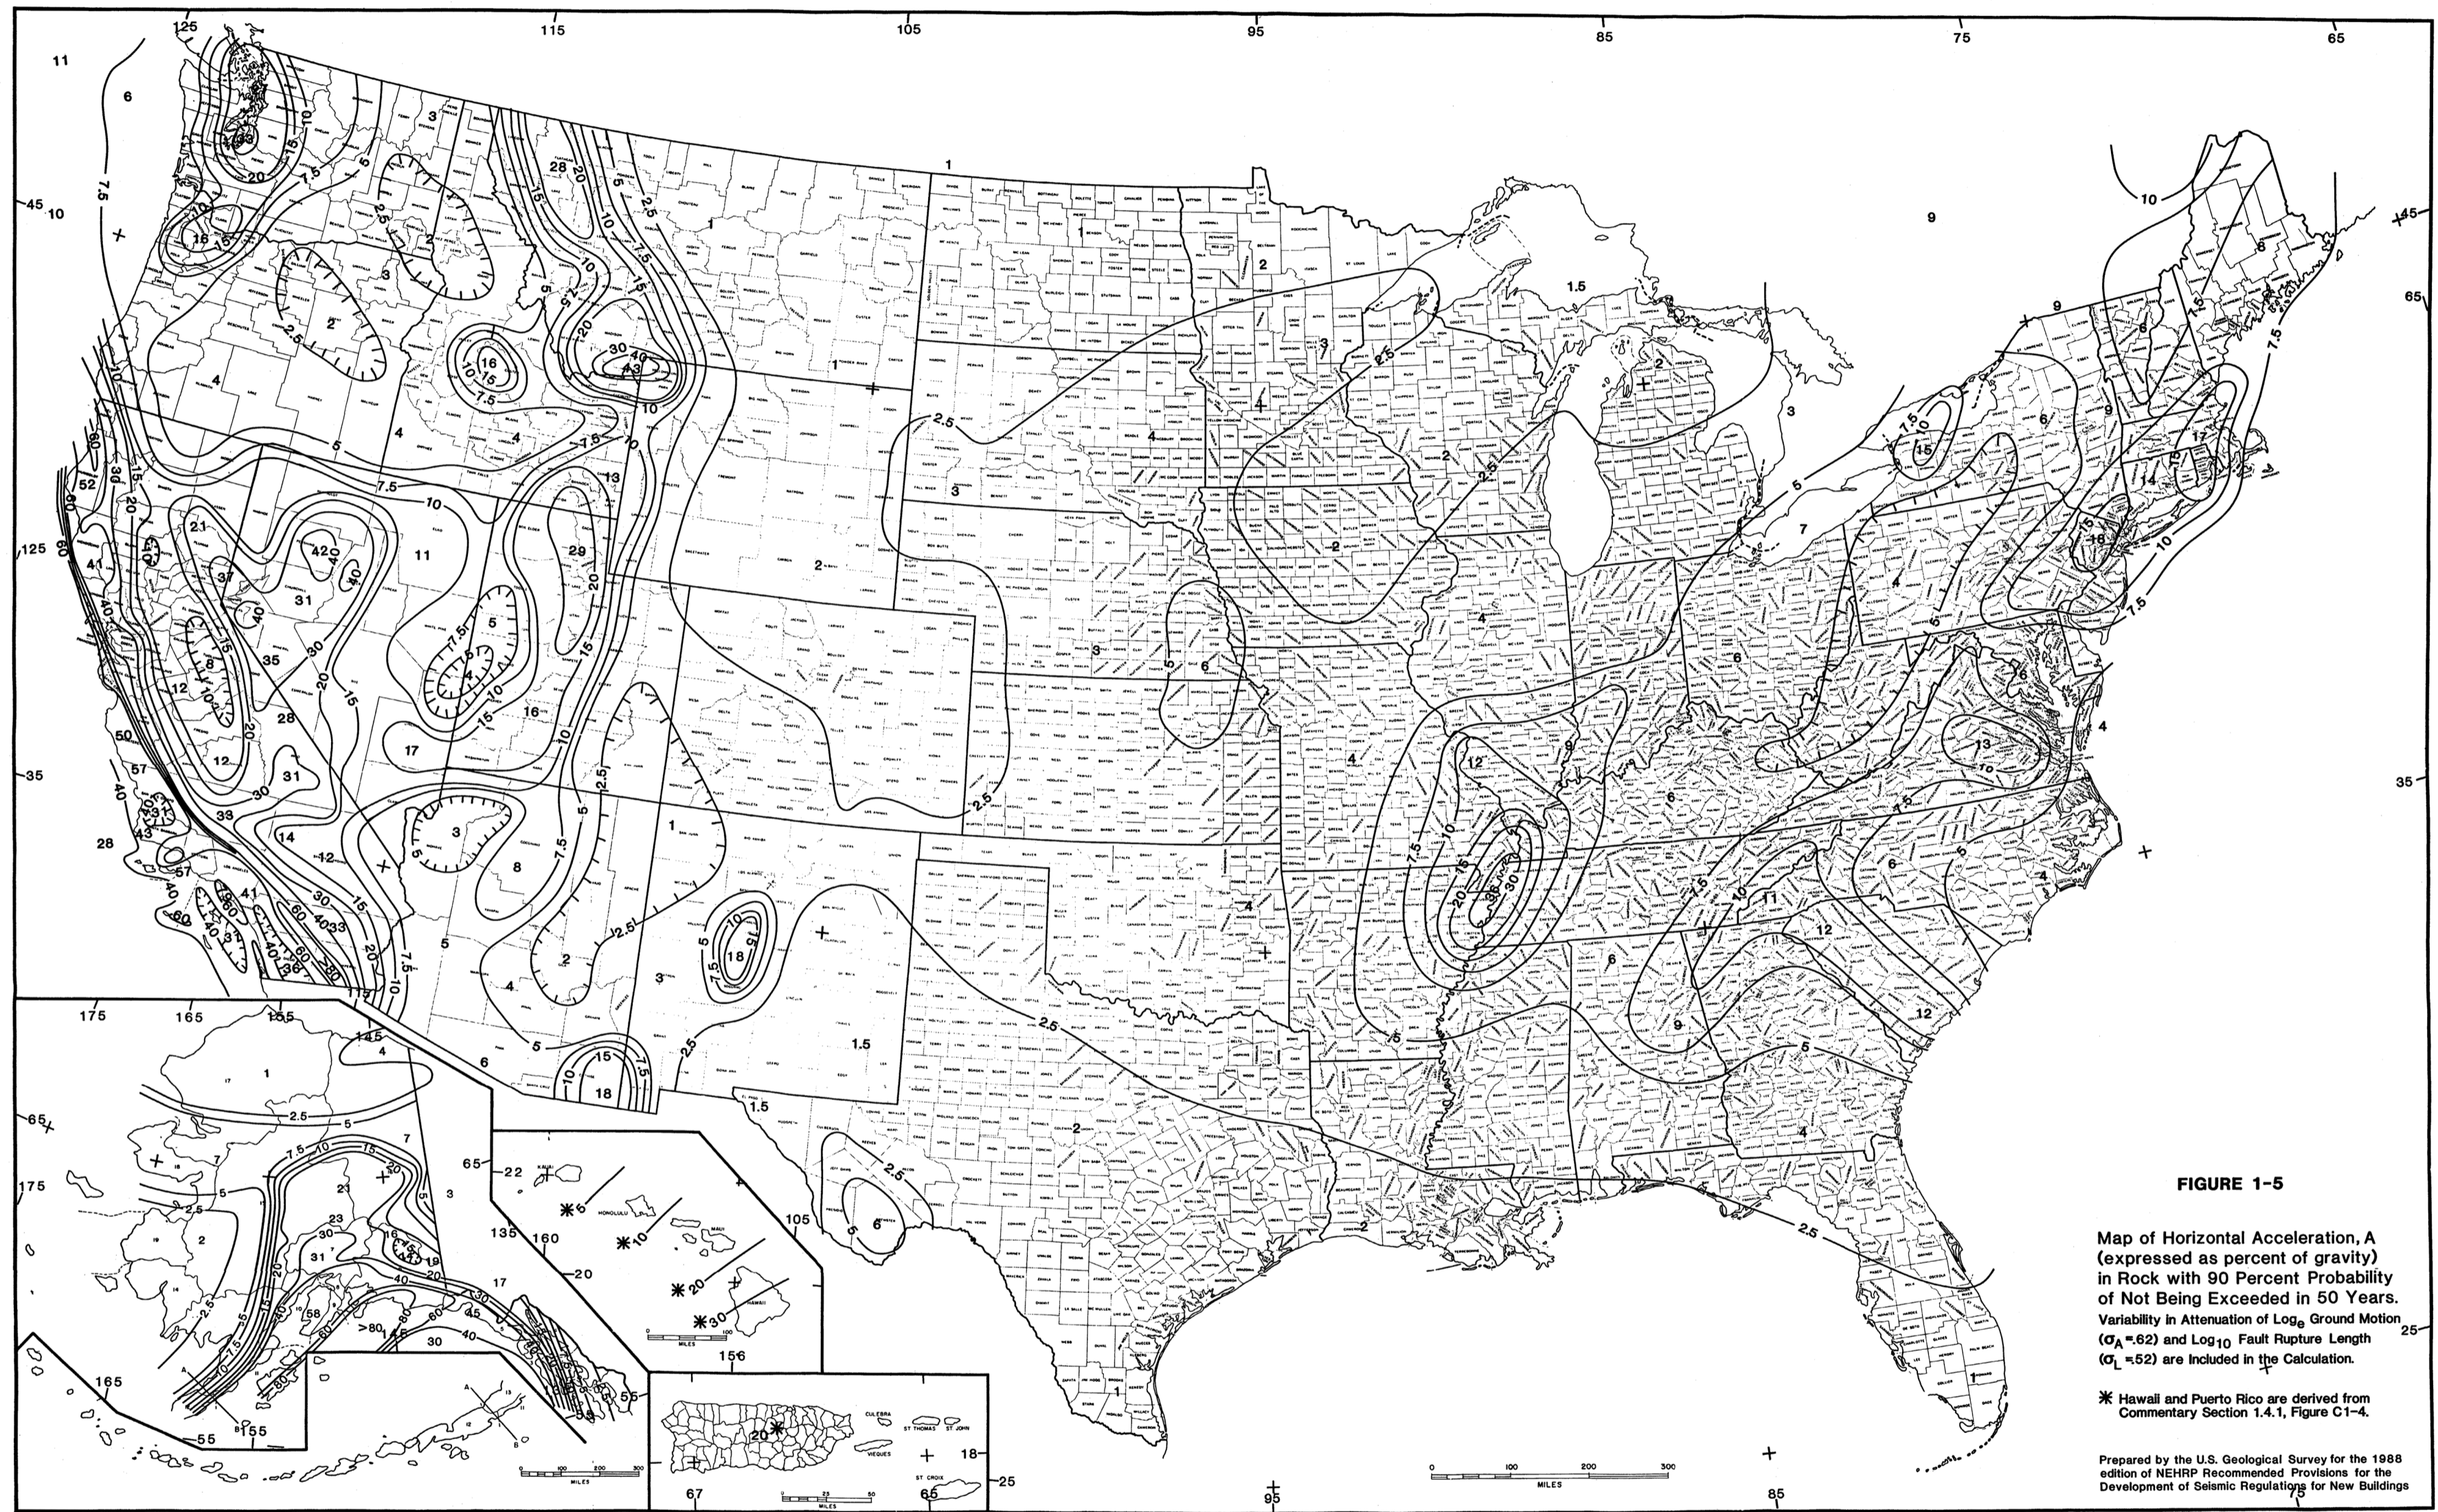


FIGURE 1-5

Map of Horizontal Acceleration, A (expressed as percent of gravity) in Rock with 90 Percent Probability of Not Being Exceeded in 50 Years. Variability in Attenuation of \log_e Ground Motion ($\sigma_A = 0.62$) and \log_{10} Fault Rupture Length ($\sigma_L = 0.52$) are included in the Calculation.

* Hawaii and Puerto Rico are derived from Commentary Section 1.4.1, Figure C1-4.

Prepared by the U.S. Geological Survey for the 1988 edition of NEHRP Recommended Provisions for the Development of Seismic Regulations for New Buildings